



**POWERTRAC** TYRES

*Enjoy powerful traction*

**TBR TIRES**



Position : All Position



## CONFORT EXPERT

- Premium five-rib tread with various micro sipes to provide high mileage, even wear, low noise .
- Wide, flat tread optimizes footprint shape for improved handling and response in long haul service .
- Latest technology carcass geometry and materials for enhanced damage resistance, durability .

Size	RIM	P.R.	LI/S.R.	Max load(kg)		A.P.		S.W.	O.D.	T.D.
	inch			Single	Dual	KPA	PSI	mm	mm	mm
11R22.5	8.25	16	146/143M	3000	2725	830	120	279	1054	13
11R24.5	8.25	16	149/146M	3250	3000	830	120	279	1104	11
11R24.5	8.25	14	146/143M	3000	2725	720	104	279	1104	11
12R22.5	9.00	18	152/149M	3550	3250	930	135	300	1085	14.5
295/80R22.5	9.00	18	152/149M	3550	3250	900	131	298	1044	14.5
295/75R22.5	9.00	16	146/143M	3000	2725	830	120	298	1014	11
315/80R22.5	9.00	20	156/150M	4000	3350	850	123	312	1076	14.5
285/75R24.5	8.25	14	144/141M	2800	2725	760	110	283	1050	11
285/75R24.5	8.25	16	147/144M	3075	2800	830	120	283	1050	11

Position : All Position



## HIGH PERFORM

- Optimized block tread patterns along with longitudinal pattern grooves ensures excellent handling, strong driving force, great grip on wet road and provides sufficient power on both curves and ramps .
- Wide, flat tread optimizes footprint shape for improved handling and response in long haul service .
- Latest technology carcass geometry and materials for enhanced damage resistance, durability .

Size	RIM	P.R.	LI/S.R.	Max load(kg)		A.P.		S.W.	O.D.	T.D.
	inch			Single	Dual	KPA	PSI	mm	mm	mm
12R22.5	9.00	18	152/149M	3550	3250	930	135	300	1075	14.5
315/80R22.5	9.00	20	156/150M	4000	3350	850	123	312	1076	14.5



Position : All Position

## CONTACT EXPERT

- Strong carcass design provide long service life .
- Wide and depth pattern design provides good turning stability .
- Excellent anti-uneven wear character .

Size	RIM	P.R.	LI/S.R.	Max load(kg)		A.P.		S.W.	O.D.	T.D.
	inch			Single	Dual	KPA	PSI			
6.50R16LT	5.50F	12	110/105L	1060	925	670	97	185	750	11

Position : All Position



## POWER CONTACT

- High density, flexomatic blading, for outstanding braking on wet surfaces combined with high mileage .
- Groove bottom protectors help deliver additional defense against stone drilling .
- More mileage and greater lateral stability .

Size	RIM	P.R.	LI/S.R.	Max load(kg)		A.P.		S.W.	O.D.	T.D.
	inch			Single	Dual	KPA	PSI			
215/75R17.5	6.00	16	127/124M	1750	1600	830	120	211	767	12
215/75R17.5	6.00	18	135/133J	2180	2060	850	123	211	767	12
225/70R19.5	6.75	14	128/126M	1800	1700	760	110	226	811	12.5
235/75R17.5	6.75	16	132/129M	2000	1850	830	120	233	797	12.5
235/75R17.5	6.75	18	143/141J	2725	2575	875	127	233	797	12.5
245/70R19.5	7.50	16	136/134M	2180	2060	830	120	248	839	12.5
11R22.5	8.25	14	144/142M	2800	2650	720	104	279	1054	14.5
11R22.5	8.25	16	146/143M	3000	2725	830	120	279	1054	14.5
11R24.5	8.25	14	146/143M	3000	2725	720	104	279	1104	14.5
11R24.5	8.25	16	149/146M	3250	3000	830	120	279	1104	14.5
285/75R24.5	8.25	14	144/141M	2800	2575	760	110	283	1050	15.5
285/75R24.5	8.25	16	147/144M	3075	2800	830	120	283	1050	15.5
295/80R22.5	9.00	18	152/149M	3550	3250	900	131	298	1044	15.5
295/75R22.5	9.00	16	146/143M	3000	2725	830	120	298	1014	15.5
315/70R22.5	9.00	20	154/150M	3750	3350	900	131	312	1014	15
315/80R22.5	9.00	20	156/150M	4000	3350	850	123	312	1076	15.5
385/55R22.5	12.25	20	160L	4500	4500	900	131	386	996	15.5
385/65R22.5	11.75	20	160L	4500	4500	900	131	389	1072	15.5
265/70R19.5	7.50	16	140/138M	2500	2360	830	120	260	862	12.5
275/70R22.5	8.25	16	144/141M	3150	2900	900	131	216	952	14.5
285/70R19.5	8.25	16	146/144M	3000	2800	900	131	282	886	13

Position : All Position



## POWER STEERER

- High density, flexomatic blading, for outstanding braking on wet surfaces combined with high mileage .
- Premium five-rib tread with various micro sipes to provide high mileage, even wear, low noise .
- More mileage and greater lateral stability .

Size	RIM	P.R.	L.I/S.R.	Max load(kg)		A.P.		S.W.	O.D.	T.D.
	inch			Single	Dual	KPA	PSI			
11R22.5	8.25	14	144/142M	2800	2650	720	104	279	1054	14.5
11R22.5	8.25	16	146/143M	3000	2725	830	120	279	1054	14.5
11R24.5	8.25	14	146/143M	3000	2725	720	104	279	1104	14.5
11R24.5	8.25	16	149/146M	3250	3000	830	120	279	1104	14.5
295/75R22.5	9.00	16	146/143M	3000	2725	830	120	298	1014	15.5

Position : Trailer Position



## CROSS TRAC

- Dual compound rubber helps ensure cool operating temperatures while abrasion resistant upper tread helps keep wear rates low .
- Lateral sipes along rib edges help enhance traction and braking in adverse weather conditions .
- Optimized bead area construction for better durability .

Size	RIM	P.R.	L.I/S.R.	Max load(kg)		A.P.		S.W.	O.D.	T.D.
	inch			Single	Dual	KPA	PSI			
275/70R22.5	8.25	16	148/145M	3150	2900	900	131	272	952	14.5
385/65R22.5	11.75	20	160L	4500	4500	900	131	389	1072	15
385/55R22.5	12.25	20	160L	4500	4500	900	131	385	998	15.5
425/65R22.5	13.00	20	165L	5150	5150	825	120	422	1028	15.5

Position : Drive Position



## POWER PRO

- Extra deep tread with stone drilling protectors to promote long original mileage .
- Optimised bead area construction for better durability .
- Closed -shoulder tread design provides even wear while maintaining excellent traction .

Size	RIM	P.R.	L.I/S.R.	Max load(kg)		A.P.		S.W.	O.D.	T.D.
	inch			Single	Dual	KPA	PSI			
11R22.5	8.25	16	146/143K	3000	2725	830	120	279	1054	20
11R24.5	8.25	16	149/146K	3250	3000	830	120	279	1104	20
295/75R22.5	9.00	16	146/143K	3000	2725	830	120	298	1014	20
285/75R24.5	8.25	16	147/144L	3075	2800	760	120	283	1050	20

Position : All Position



## CROSS PERFORM

- Premium five-rib tread with SILICA compound features longer tire life with low rolling resistance .
- Latest technology carcass geometry and materials for enhanced damage resistance, durability and loading capacity .
- Computer aided carcass design helps improve footprint for better mileage performance .

Size	RIM	P.R.	LI/S.R.	Max load(kg)		A.P.		S.W.	O.D.	T.D.
	inch			Single	Dual	KPA	PSI	mm	mm	mm
11.00R20	8.0	18	152/149K	3550	3250	930	135	293	1085	17

Position : Trailer Position




## CROSS STAR

- Five deep circumferential grooves for excellent water evacuation and wet traction .
- Low heat sidewall design, even load distribution for longer mileage and reduced tire wear .
- Optimized bead area construction for better durability .

Size	RIM	P.R.	LI/S.R.	Max load(kg)		A.P.		S.W.	O.D.	T.D.
	inch			Single	Dual	KPA	PSI	mm	mm	mm
385/65R22.5	11.75	20	160L	4500	4500	900	131	389	1072	15

Position : Trailer Position

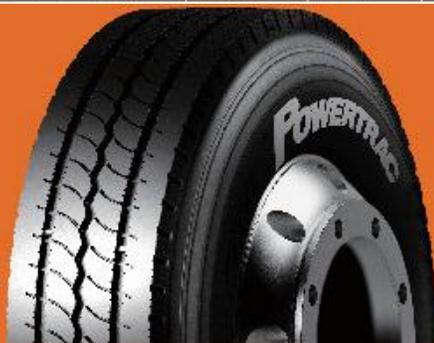

## CONTACT PRO

- Longer wear life & service life .
- Improved irregular wear resistance .
- Improved cut/chipping resistance .

Size	RIM	P.R.	LI/S.R.	Max load(kg)		A.P.		S.W.	O.D.	T.D.
	inch			Single	Dual	KPA	PSI	mm	mm	mm
12.00R24	8.50	20	160/157K	4500	4125	900	131	315	1226	16

Position : Drive Position



## POWER PLUS+

- ✔ WIDER TREAD,ENSURE DRIVING SAFETY.
- ✔ BETTER STRUCTURE,ENSURE THE SAFETY AND LONGER MILEAGE.
- ✔ SPECIAL DESIGN,ENSURE HEAT RADIATION AND DURABILITY.
- ✔ SUPERIOR IRREGULAR WEAR RESISTANCE.

Size	RIM	P.R.	LI/S.R.	Max load(kg)		A.P.		S.W.	O.D.	T.D.
	inch			Single	Dual	KPA	PSI	mm	mm	mm
11R22.5	8.25	16	146/143M	3000	2725	830	120	279	1054	20
11R22.5	8.25	14	144/142M	2800	2650	720	104			
12R22.5	9.00	18	152/149M	3550	3250	930	135	300	1084	20
275/70R22.5	8.25	16	148/145M	3150	2900	900	131	272	962	18
275/70R22.5	8.25	18	152/148M	3550	3150	930	135	272	962	18
295/80R22.5	9.00	18	152/149L	3550	3250	900	131	298	1044	20
315/80R22.5	9.00	20	156/150K	4000	3350	850	123	312	1076	20
315/70R22.5	9.00	20	154/150L	3750	3350	900	131	312	1020	20



# POWERTRAC TYRES

**Enjoy Powerful Traction**